The .75″ holes will accomodate .75″ OD press fit bronze bushings.

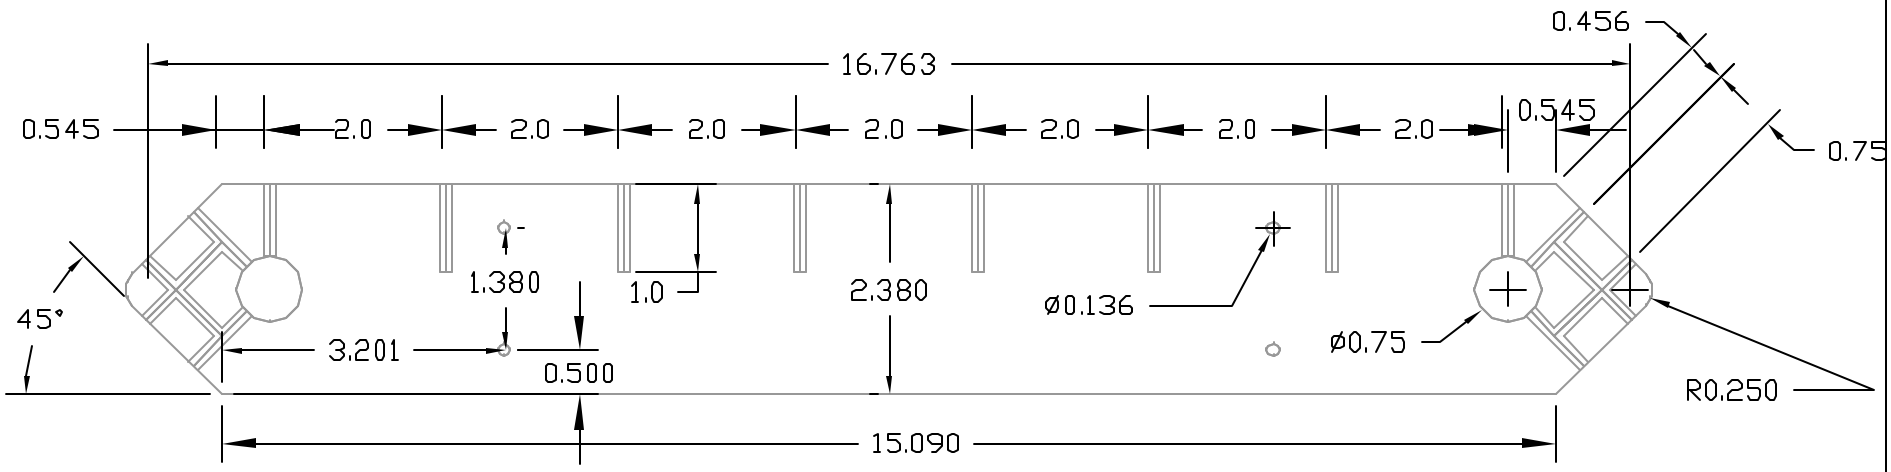

The four small holes in the face are tapped #8-32.
All tapped holes are centered on the 3/8″ thickness, with #8-32 threads.
Two of these pieces will be cut from one piece of 3/8″ x 2.5″ x 36″ 304 stainless steel.

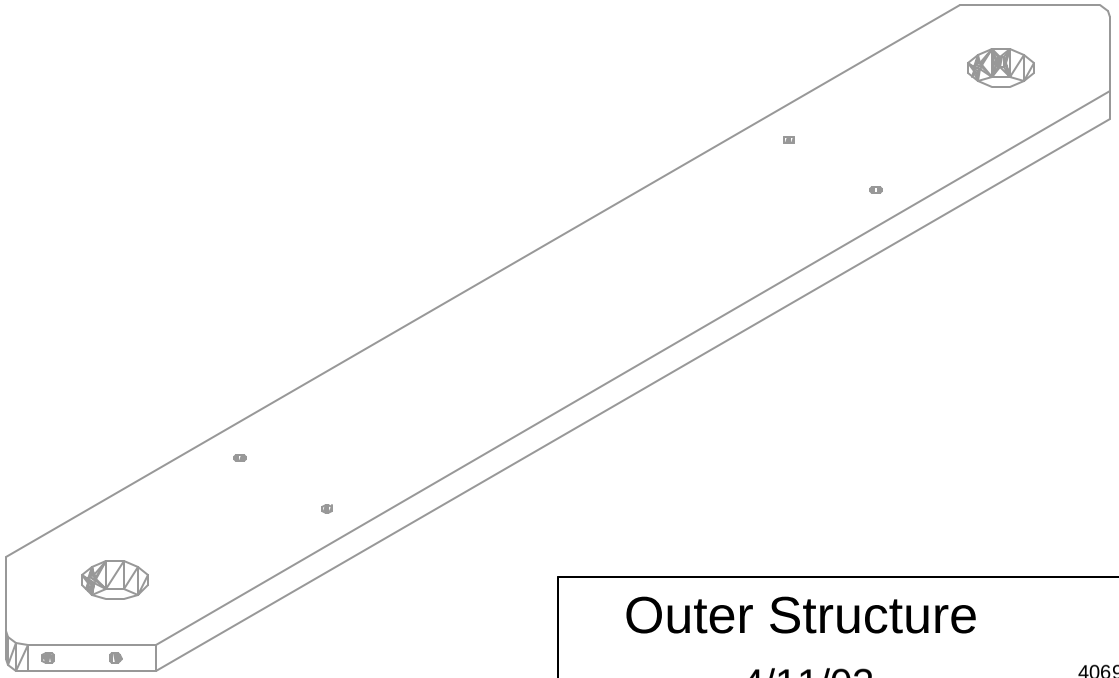

Outer Structure

4/11/02

Clobberbots
Joseph P Fieber
4069 South Packard Avenue, St. Francis, WI 53235
414-482-8905